


FCSL495 and FCSL595 - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



t 800.900.1730 f 630.889.8106
3609 Swenson Ave. St. Charles, IL 60174

DETAILED ILLUSTRATION

GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. These fixtures are intended for mounting on a wall and wiring being completed within a J-box.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

INSTALLATION:

NOTE: When installing both the SL495 or SL595, Center the fixture over an octagonal or single-gang J-box so the wiring hole in the back Mounting Plate aligns with the front of the J-box opening. **Fig. 1**

1. Make sure J-box is properly installed and wired appropriately. (By others)
2. Loosen ALL 3 side set screws to remove back Mounting Plate assembly.
3. Center junction box between mounting holes on Mounting Plate and level side to side against the wall. **Fig. 1** Use mounting holes on Mounting Plate as a template to mark the positions on the wall for hanging screws (by others). Ensure back plate is level. **Fig. 2**
4. Remove fixture from wall and feed wires from fixture through Mounting Plate and into J-box. Complete all wiring at J-box. **Fig. 3**
5. **Installer MUST add a continuous bead of silicone caulk on the back of the Mounting Plate, as indicated, to avoid any water entering into the J-box from above.** **Fig. 5**
6. Secure the Mounting Plate to the wall with hanging screws in the previously mark positions, while keeping the fixture level. **Fig. 3**
7. Install Fixture onto Mounting Plate using supplied set screws. **Fig. 4**

NOTE: Fixtures are listed for installation with liquid tight or rigid wall conduit only. Fixtures installed without a continuous silicone bead will void the warranty.

FCSL495 and FCSL595 install using the same method.

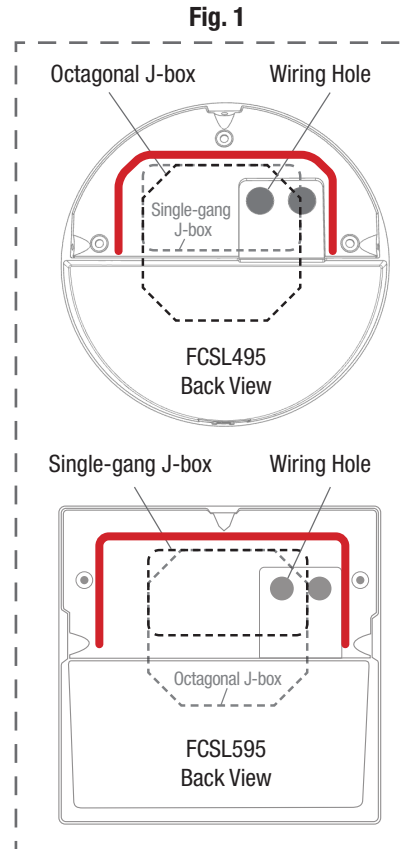


Fig. 5 Continuous Silicone Bead indicated above by solid red line.

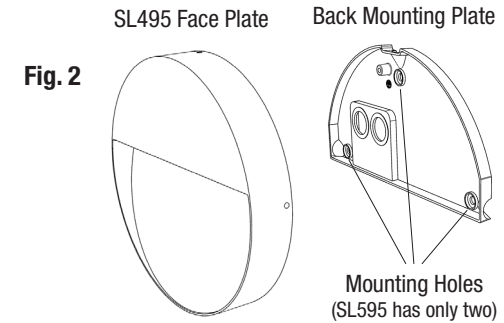


Fig. 2

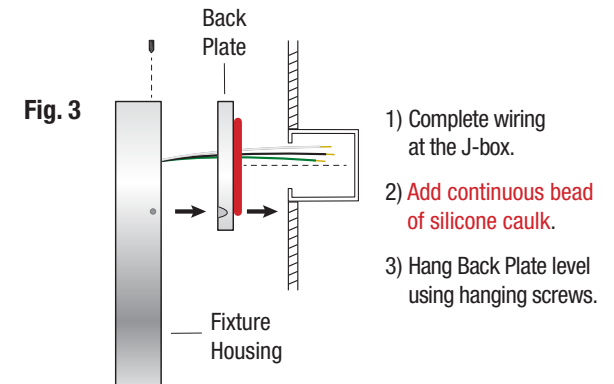


Fig. 3

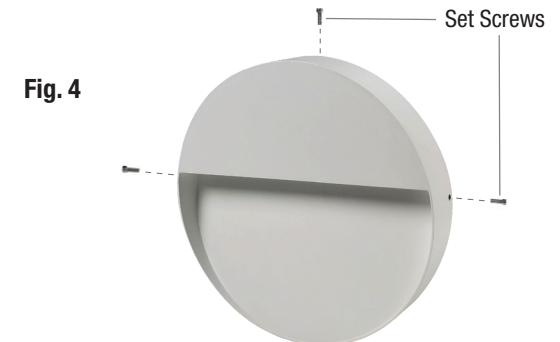


Fig. 4

FCSL495 and FC SL595 (Direct to Wall - No JBox) - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



FC
LIGHTING

t 800.900.1730 f 630.889.8106
3609 Swenson Ave. St. Charles, IL 60174

DETAILED ILLUSTRATION

GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. These fixtures are intended to be mounted to a J-Box directly supported by the building structure.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

INSTALLATION:

1. Loosen or remove Hex Screws to detach Back Mounting Plate from Housing. **Fig. 1**
2. Attach Conduit Coupling to Mounting Plate using Lock Nut (provided by other). **Fig. 2**
3. Fasten Flex Cable with wiring to Conduit Coupling and tighten set screw. **Fig. 3**
4. Hang the Mounting Plate on the intended Mounting Surface, ensuring that it's level before securing it in place. Mounting fasteners to be determined by installer.


NOTE: The opening in the Mounting Surface should be large enough to pass the Conduit Connector through, so the Mounting Plate pushes flush to the surface.

5. Make wiring connections in the fixture housing.

NOTE: Exterior wet location installation requires using Silicone Wire Nuts.

6. Attach Green Ground Wire to inside of housing using holes provided. **Fig. 4**
7. Install Housing onto Mounting Plate using provided Hex Screws. Tighten screws evenly and avoid over tightening. **Fig. 5**
8. Installer MUST add a bead of silicone where the edge of the Fixture meets the Mounting Surface.

NOTE: Fixtures are listed for installation with liquid tight or rigid wall conduit only. Fixtures installed without a silicone bead will void the warranty.

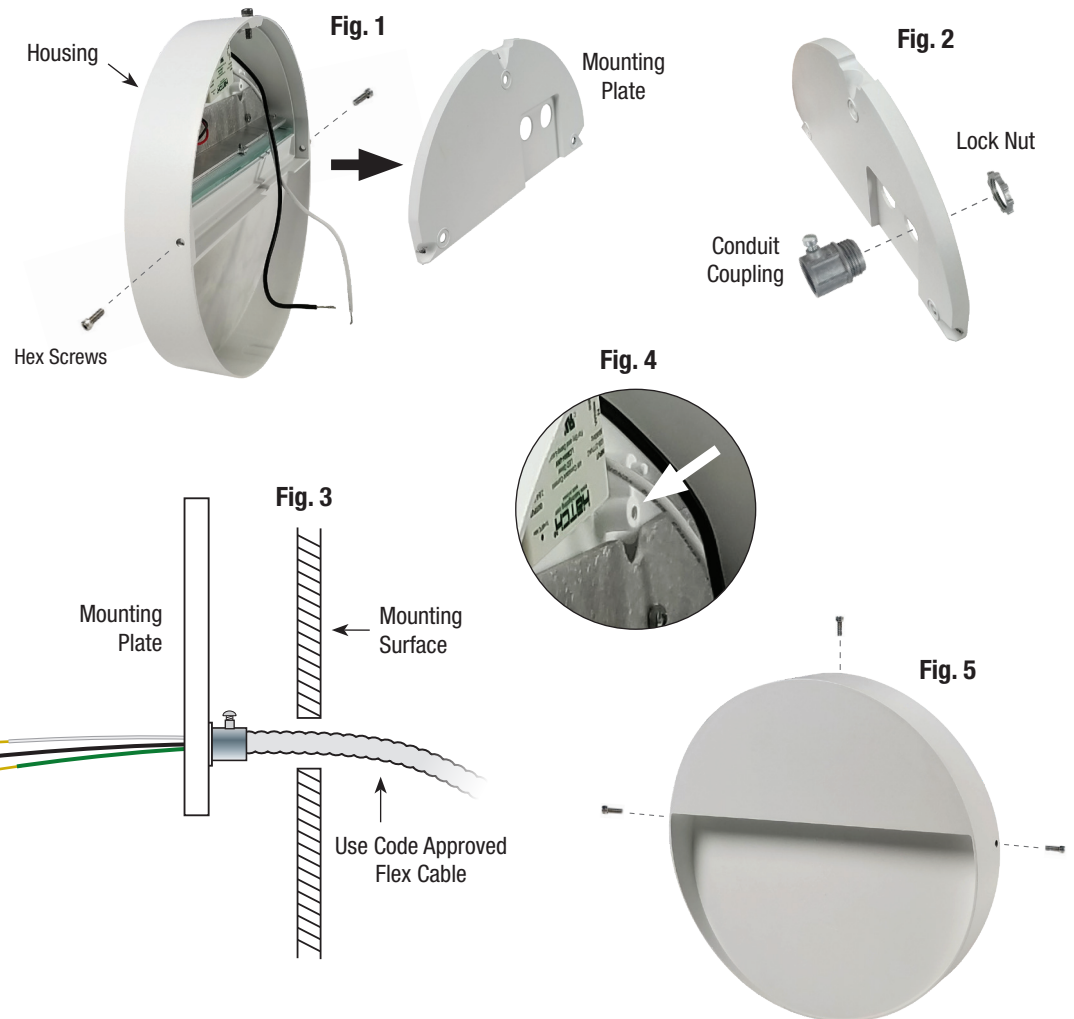

CONFIDENTIAL

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF FC LIGHTING, INC. ANY UNAUTHORIZED TRANSFER, USE OR REPRODUCTION IS STRICTLY PROHIBITED.

JO Rev. 1216

©2016 FC LIGHTING, INC.